



Certificate no.
Certificado nº **PSK – 006/2017**

Name and address of certificate holder:
Nome e morada do titular do certificado:

EMMVEE SOLAR SYSTEMS PRIVATE LIMITED
Solar Tower # 55, 6 TH Main, 11 TH Cross
Lakshmaiah Block, Ganganagar
Bangalore – 560024, INDIA

Product:
Produto:

Thermal solar collector
Coletor solar térmico

Type references:
Referências:

ES2000B

Trademark(s):
Marca(s) comercial(is):

SOLARIZER

Technical characteristics:
Características técnicas:

Summary of EN 12975 Test Results: Registration No. PSK-006/2017
(in annex)
*Resumo dos resultados dos ensaios realizados segundo a norma EN 12975:
Registo Nº PSK-006/2017 (em anexo)*

This product is in conformity with:
Este produto está em conformidade com:

EN 12975-1:2006+A1:2010, EN 12975-2:2006

and with the Specific Keymark Scheme Rules for Solar Thermal Products
e com as Regras Particulares do CEN Keymark Scheme para Produtos Solares Térmicos.

Test report(s) no. / issued by:
Relatório(s) de ensaios nº(s) / emitido(s) por:

30.1842.0-1-1 and /e 30.1842.0-2-1 / CENER

Additional information (if any):
Informação adicional (se existir):

This certificate is valid until:
Este certificado é válido até:

2022-06-28

and supersedes certificate no:
e substitui o certificado nº:

Date of issue:
Data de emissão:

2017-06-29



Francisco Barroca
General Manager / *Diretor Geral*




This Certificate includes one Annex with 2 (two) pages
Este Certificado é constituído por um Anexo com 2 (duas) páginas



Associação para a Certificação

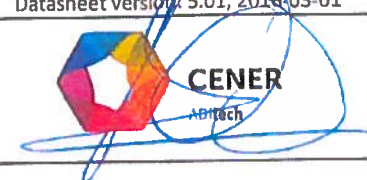

Annex to Solar Keymark Certificate - Summary of EN ISO 9806:2013 Test Results					Licence Number		PSK-006/2017							
					Date issued		2017-06-29							
					Issued by		CERTIF							
Licence holder	EMMVEE Solar Systems Private Limited				Country	INDIA								
Brand (optional)	SOLARIZER				Web	http://www.emmvee.com								
Street, Number	Solar Tower # 55, 6 TH MAIN, 11 TH Cross Lashmaiah Block, Ganganagar				E-mail	srinath.t@emmvee.in								
Postcode, City	560024 BANGALORE				Tel	+91 80 4323 3442 / 2333 2060								
Collector Type					Flat plate collector, glazed									
Collector name	Gross area (A _G) m ²	Gross length mm	Gross width mm	Gross height mm	Power output per collector G _b = 850 W/m ² ; G _d = 150 W/m ² θ _m - θ _a									
					0 K W	10 K W	30 K W	50 K W	70 K W	55 K W				
ES2000B	2,09	2.040	1.025	110	1.461	1.388	1.226	1.044	843	994				
					699	664	587	500	403	475				
Performance parameters test method					Steady state - indoor									
Performance parameters (related to A _G)					η _{0,hem}	a ₁	a ₂							
Units					-	W/(m ² K)	W/(m ² K ²)							
Test results					0,699	3,386	0,012							
Incidence angle modifier test method					Steady state - outdoor									
Bi-directional incidence angle modifiers					No									
Incidence angle modifier					Angle	10°	20°	30°	40°	50°	60°	70°	80°	90°
Transversal					K _{BT, coll}					0,85			0,00	
Longitudinal					K _{BL, coll}					0,85			0,00	
Heat transfer medium for testing					Water									
Flow rate for testing (per gross area, A _G)					dm/dt	0,020		kg/(sm ²)						
Maximum temperature difference for thermal performance calculations					(θ _m -θ _a) _{max}	55,21		K						
Standard stagnation temperature (G = 1000 W/m ² ; θ _s = 30 °C)					θ _{stg}	218,6		°C						
Effective thermal capacity, Incl. fluid (per gross area, A _G)					C/m ²	4,761		kJ/(Km ²)						
Maximum operating temperature					θ _{max op}	85		°C						
Maximum operating pressure					p _{max op}	800		kPa						
Testing laboratory					Fundación CENER - CIEMAT			http://www.cener.com						
Test report(s)					30.1842.0-1-1 30.1842.0-2-1			Dated		12/06/2012 14/06/2012				
Comments of testing laboratory					This collector was tested according to EN 12975-2 in 2012.									
					 Datasheet version: 5.01, 2016-03-01									
CERTIF - Associação para a Certificação Rua José Afonso, 9E - 2810-237 Almada - Portugal Tel: +351 212 586 940 / Fax: +351 212 586 959 / mail@certif.pt / www.certif.pt														

Annex to Solar Keymark Certificate Supplementary Information	Licence Number	PSK-006/2017
	Issued	2017-06-29

Annual collector output in kWh/collector at mean fluid temperature ϑ_m , based on ISO 9806:2013 test results													
Collector name	ϑ_m	Athens			Davos			Stockholm			Würzburg		
		25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C
ES2000B		2.149	1.486	939	1.622	1.096	670	1.187	761	452	1.286	812	472
Annual output per m ² gross area		1.028	711	449	776	525	320	568	364	216	615	388	226
Fixed or tracking collector		Fixed (slope = latitude - 15°; rounded to nearest 5°)											
Annual irradiation on collector plane		1765 kWh/m ²			1714 kWh/m ²			1166 kWh/m ²			1244 kWh/m ²		
Mean annual ambient air temperature		18,5°C			3,2°C			7,5°C			9,0°C		
Collector orientation or tracking mode		South, 25°			South, 30°			South, 45°			South, 35°		

The collector is operated at constant temperature ϑ_m (mean of in- and outlet temperatures). The calculation of the annual collector performance is performed with the official Solar Keymark spreadsheet tool Scenocalc Ver. 5.01 (March 2016). A detailed description of the calculations is available at www.solarkeymark.org/scenocalc

Additional Information

Collector heat transfer medium	Water-Glycole	
Hybrid Thermal and Photo Voltaic collector	No	
The collector is deemed to be suitable for roof integration	Yes	
The collector was tested successfully according to EN ISO 9806:2013 under the following conditions:		
Climate class (A, B or C)	C	--
Maximum tested positive load	1000	Pa
Maximum tested negative load	1000	Pa
Hail resistance using ice balls (diameter)	25	mm

Energy Labelling Information

Reference Area, A_{col} (m ²)	Data required for CDR (EU) No 811/2013 - Reference Area A_{sol}		
	ES2000B	2,09	Collector efficiency (η_{col})
Remark: Collector efficiency (η_{col}) is defined in CDR (EU) No 811/2013 as collector efficiency of the solar collector at a temperature difference between the solar collector and the surrounding air of 40 K and a global solar irradiance of 1000 W/m ² , expressed in % and rounded to the nearest integer. Deviating from the regulation η_{col} is based on reference area (A_{sol}) which is aperture area for values according to EN 12975-2 or gross area for ISO 9806:2013.			
Data required for CDR (EU) No 812/2013 - Reference Area A_{sol}			
		Zero-loss efficiency (η_0)	0,699 --
		First-order coefficient (a_1)	3,39 W/(m ² K)
		Second-order coefficient (a_2)	0,012 W/(m ² K ²)
		Incidence angle modifier IAM (50°)	0,85 --
Remark: The data given in this section are related to collector reference area (A_{sol}) which is aperture area for values according to EN 12975-2 or gross area for ISO 9806. Consistent data sets for either aperture or gross area can be used in calculations like in the regulation 811 and 812 and simulation programs.			