



Summary of EN 12975 Test Results, annex to Solar KEYMARK Certificate	Certificate No.	011-7S2045 F
	Date of issue	31-10-2012

Company	HGB Haustechnik Service GmbH & Co. KG	Country	Germany
Brand (optional)	HGB	Website	www.peterjensen.de
Street, number	Biegenhofstraße 18	E-mail	martin.jensen@peterjensen.de
Postal Code	96103	Tel.	+49 (0) 40 / 25739-199
City	Hallstadt	Fax	+49 0

Collector Type (flat plate / evacuate tubular / un-glazed)	Flat plate collector
--	----------------------

Integration <u>in</u> the roof possible ?	Yes
---	-----

Collector name	Aperture area (Aa) [m ²]	Gross length [mm]	Gross width [mm]	Gross height [mm]	Gross area (Ag) [m ²]	Power output per collector unit G = 1000 W/m ² Tm-Ta :				
						0 K	10 K	30 K	50 K	70 K
						[W]	[W]	[W]	[W]	[W]
Comfort Solar	2,120	2.099	1.099	110	2,31	1.626	1.544	1.358	1.142	895

Collector efficiency parameters related to <u>aperture area (Aa)</u> Type of fluid and flow rate see note 1	η_{0a}	0,767	-
	a_{1a}	3,669	W/(m ² K)
	a_{2a}	0,018	W/(m ² K ²)

Stagnation temperature - Weather conditions see note 2	t _{stg}	155	°C
--	------------------	-----	----

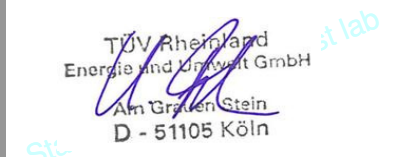
Effective thermal capacity	C _{eff} = C/Aa	7,78	kJ/(m ² K)
----------------------------	-------------------------	------	-----------------------

Max. operation pressure - see note 3	p _{max}	1000	kPa
--------------------------------------	------------------	------	-----

Incidence angle modifiers K _θ (θ)	G _{DIF} /G _{TOT}		θ _T / θ _L K _θ (θ _T)	50° 0,90	10° 1,00	20° 0,99	30° 0,97	40° 0,95	60° 0,82	70° 0,64
	min	max								
	G _{DIF} /G _{TOT} : min&max - while measuring			K _θ (θ _L)	0,90	1,00	0,99	0,97	0,95	0,82
						<i>Optional values</i>				

Testing Laboratory	TÜV Energie und Umwelt GmbH
Website	www.eco-tuv.de
Test report id. number	21220987_ComfortSolar
Date of test report	31. October 2012
Perf. test method	EN 12975-2 6.3 (outdoor)

Comments of testing laboratory :	

Note 1	Fluid	Water	Flow rate	0,015 kg/s per m ²	
Note 2	Irradiance, G _s =1000 W/m ² Ambient temperature, T _a =30 °C				
Note 3	Given by manufacturer				



Annual collector output based on EN 12975 Test Results,
annex to Solar KEYMARK Certificate

Certificate No.

011-7S2045 F

Issued

31-10-2012

Annual collector output kWh

Collector name	Location and collector temperature (T _m)														
	Athens			Davos			Stockholm			Würzburg					
	25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C			
Comfort Solar	2.635	1.853	1.159	2.135	1.423	824	1.470	935	532	1.600	1.014	567			

Collector mounting: Fixed or tracking

Fixed; slope = latitude - 15° (rounded to nearest 5°)

Overview of locations

Location	Latitude °	G _{tot} kWh/m ²	T _a °C	Collector orientation or tracking mode
Athens	38	1.765	18,5	South, 25°
Davos	47	1.714	3,2	South, 30°
Stockholm	59	1.166	7,5	South, 45°
Würzburg	50	1.244	9,0	South, 35°

G _{tot}	Annual total irradiation on collector plane	kWh/m ²
T _a	Mean annual ambient air temperature	°C
T _m	Constant collector operating temperature (mean of in- and outlet temperatures)	°C

Calculation of the annual collector performance is done by the official Solar Keymark spreadsheet tool. Hour by hour the collector output is calculated according to the efficiency parameters from the Keymark test using constant collector operating temperature (T_m). Detailed description with all equations used is available from the Solar Keymark web site (direct link:<http://www.estif.org/solarkeymark/annexb1.php>)

DIN CERTCO • Alboinstraße 56 • 12103 Berlin

Tel: +49 30 7562-1131 • Fax: +49 30 7562-1141 • E-Mail: info@dincertco.de • www.dincertco.de

Datasheet version:

VERSION 3.5, 2012.01.13

Calculation program version:

3.07, October 2011 (SP)